


ORT-20 Ozone Remediation Trailer

20 lb/day ozone trailer

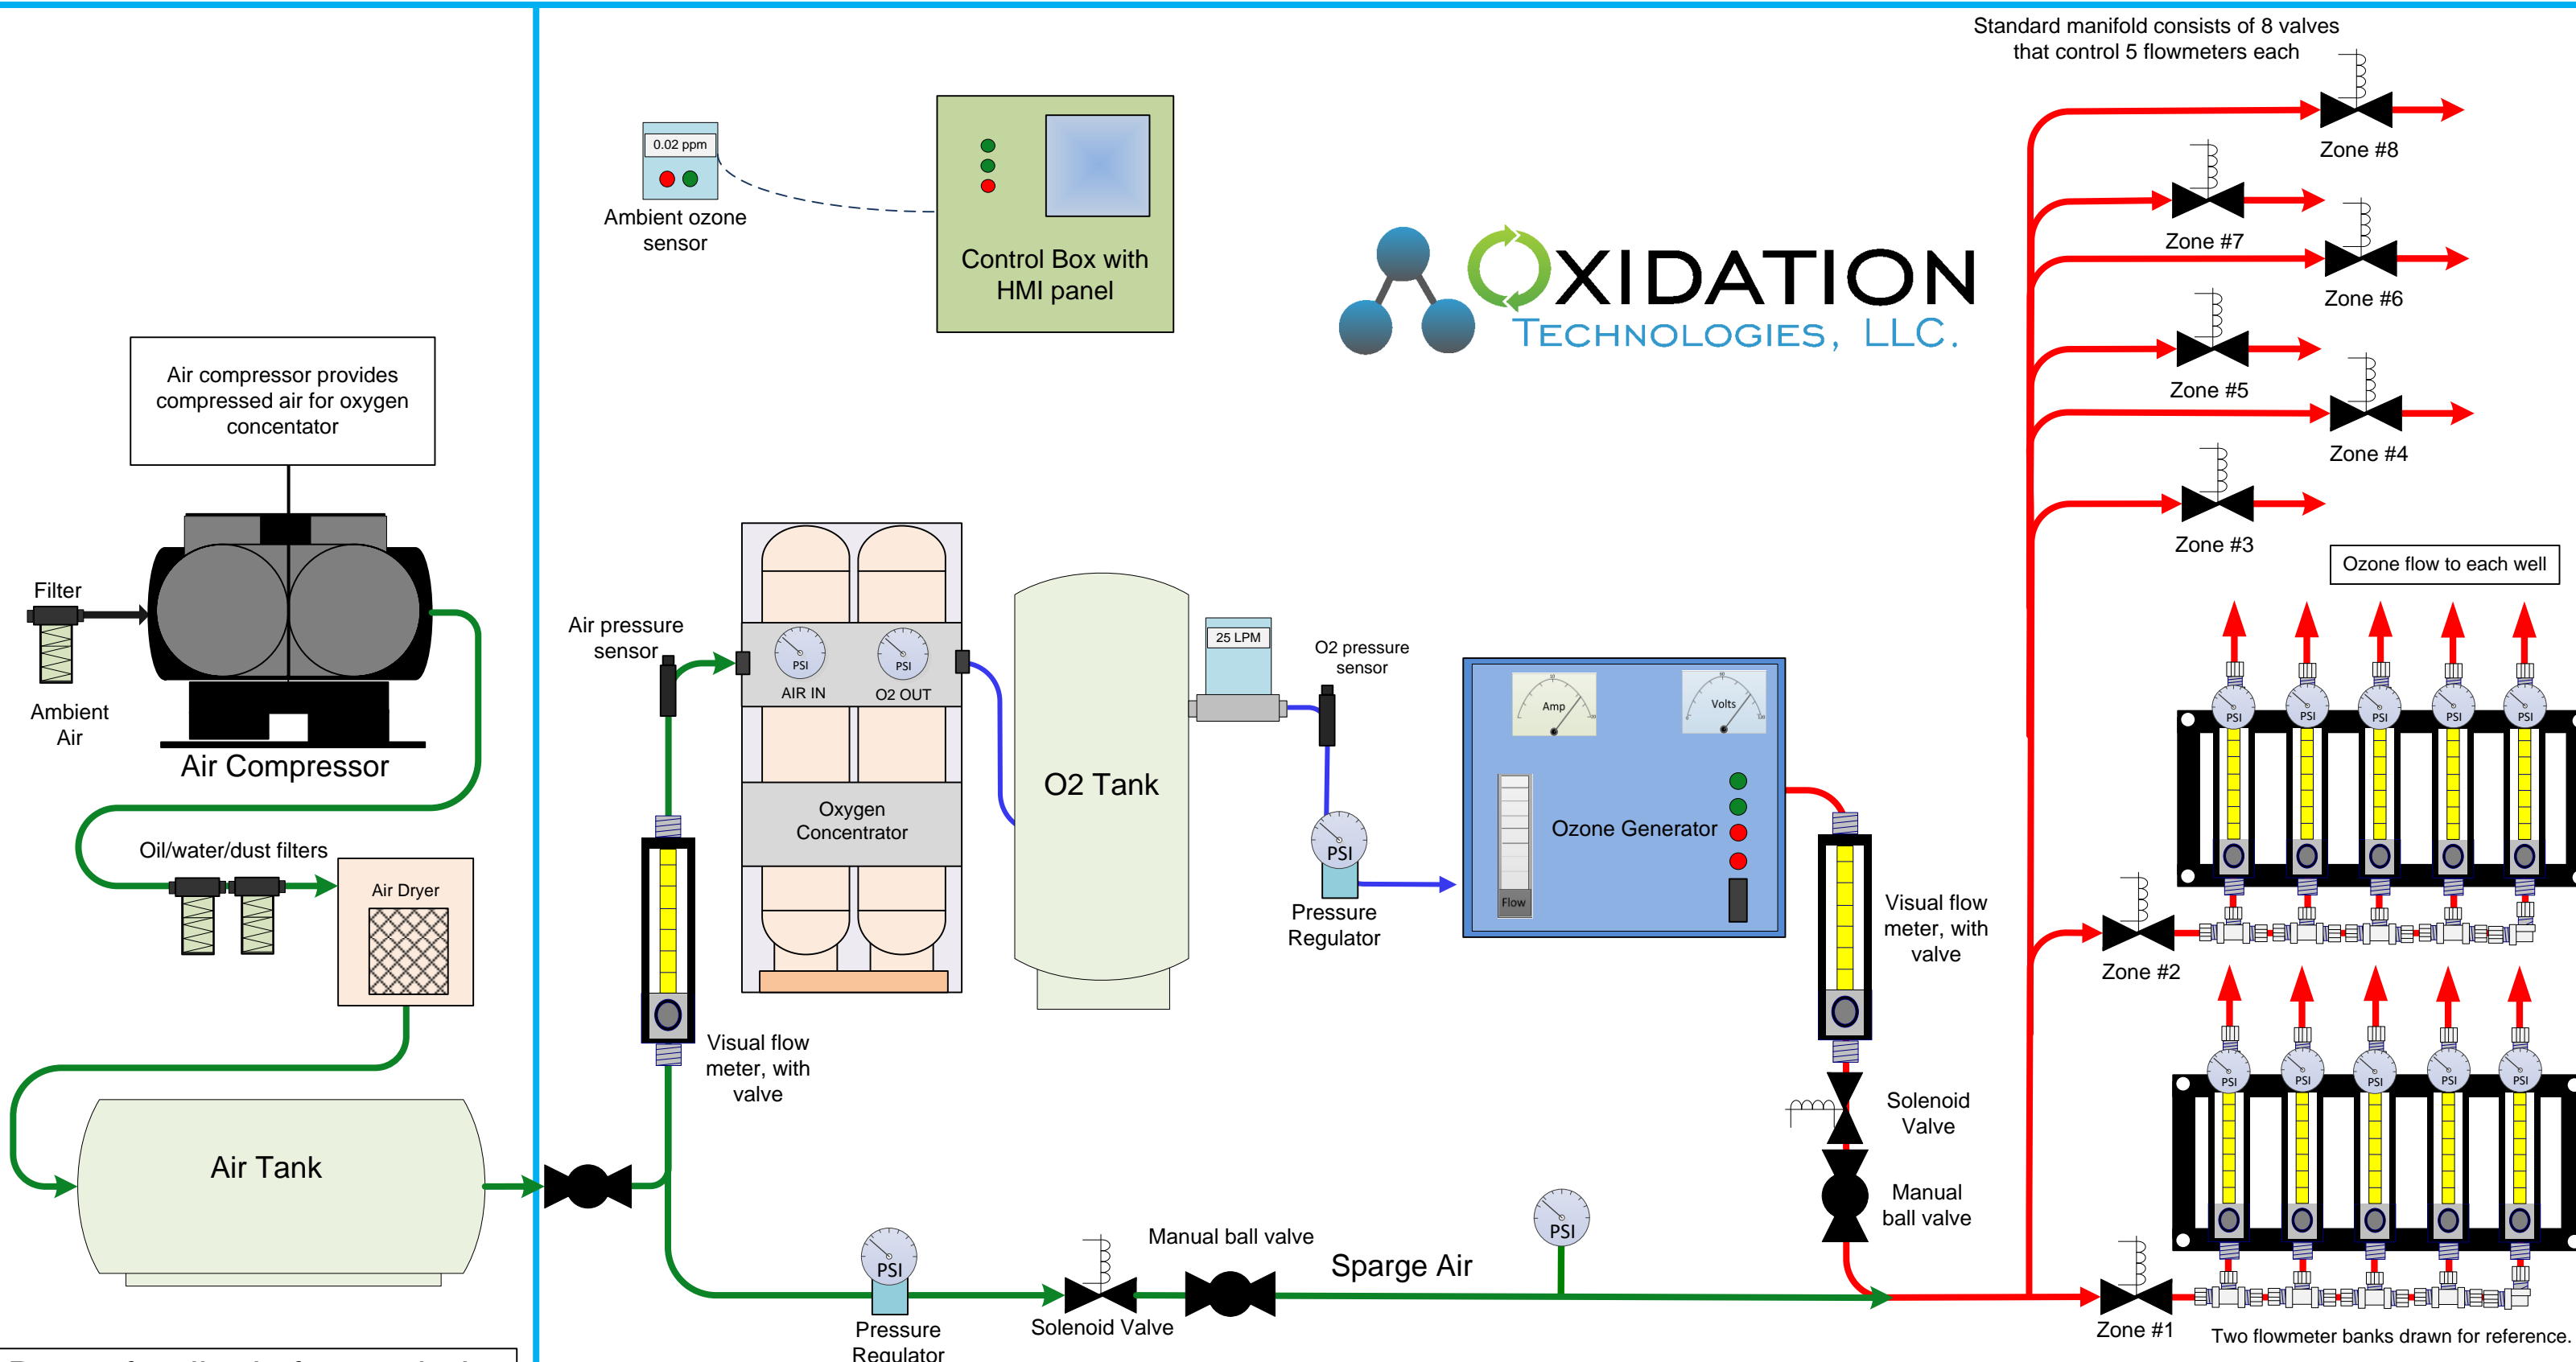

Standard manifold consists of 8 valves that control 5 flowmeters each

Ozone flow to each well

Two flowmeter banks drawn for reference.

Rear of trailer is fan cooled – contains compressor, air dryer, and air filtration

Front of trailer is Air Conditioned and kept cool – contains O2 concentrator, O2 tank, O3 generators, manifold and control system.

Each Ozone output is regulated by a flowmeter to regulate flow to each valve, sets of flowmeters are configured in zones, each zone is controlled by PLC control system. Manifold is representative, actual number of outputs may vary.