


VMD-12

KEY FEATURES:

- 12 l/min of dry air
- Compact size
- Wall mountable
- Easy to use
- Powder coated Al. Cabinet

PRODUCT DESCRIPTION

The VMD-12 is a wall mountable Air dryer unit. It can supply up to 12 l/min of dry air under normal conditions. The VMD-12 is used to supply a dry air source for up to 2 xVMUS-K (6lpm each)

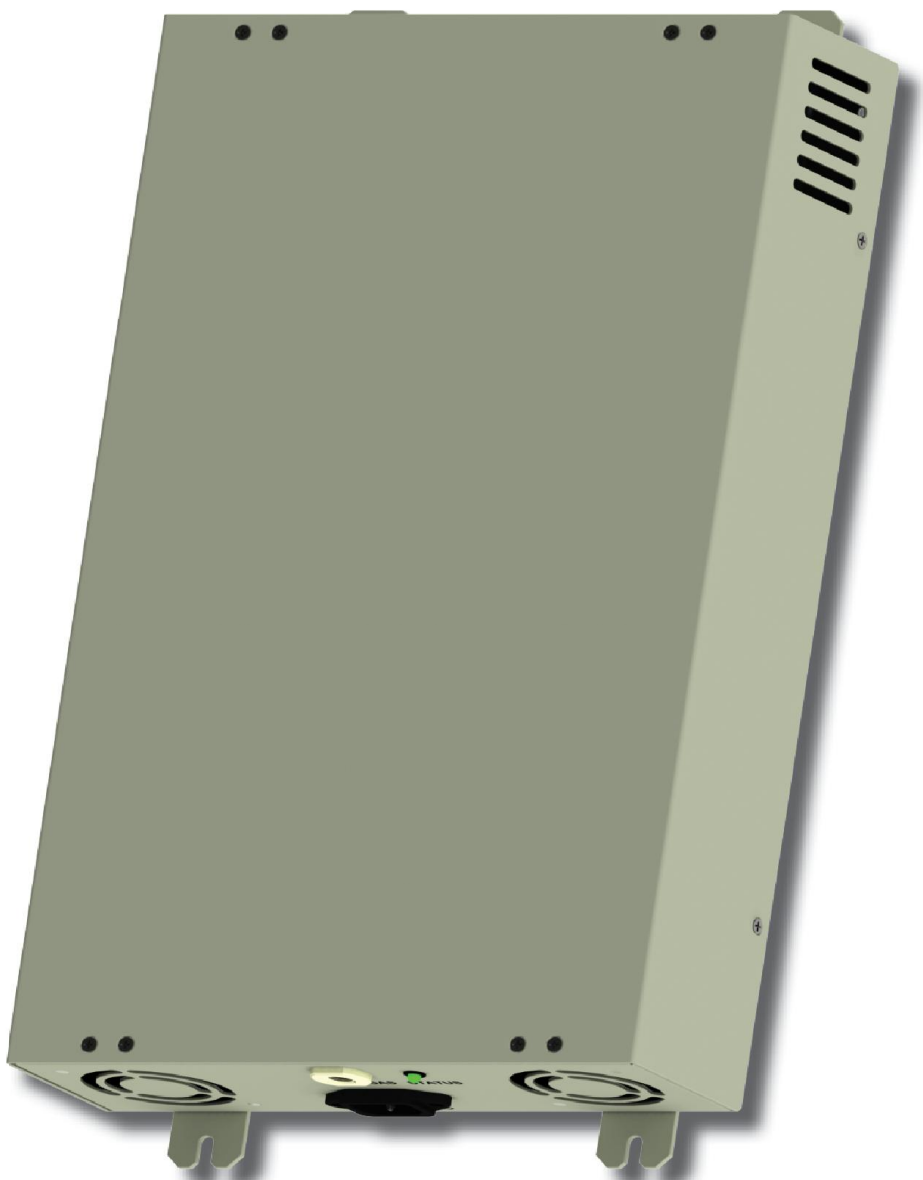

AZCO INDUSTRIES LIMITED
ADVANCED OZONE SYSTEMS

SPECIFICATIONS

	VMD-12	VMD-32	AS-12
General			
Voltage [VAC, 50/60Hz]	100-240	100-240	100-120 (200-240)
Power Consumption [W]	Average 200 (2A Max)	Average 225 (4A Max)	Max. 480W
Ambient Temperature [°C]	5 to 40		
Relative Humidity [%]	80 (non condensing)		
Mass [Kg]	4.5	8.1	28 (29.5)
Dimensions [H x W x D] [mm] 1 mm = .039 inches	435 x 258 x 78	460 x 314 x 92	680 x 440 x 250
Installation	Refer to AZCO's installation manual for specific product		
Warranty [Refer to AZCO warranty sheet]	3 Year		
Ozone			
Generation Process	N/A	N/A	N/A
Process Gas [bar] 1 bar = 14.5 psi	Ambient air, free of dust and oil. Maximum pressure ± 0.36		Up to 0.35
Production	12 l/min @ 25°C and 75% R.H.	32 l/min @ 25°C and 75% R.H.	6 l/min of 98% oxygen
Options			
Internal Air Pump	N/A	N/A	N/A
Adjustable Output	N/A	N/A	N/A
Interlock	N/A	N/A	N/A
Flow Meter	N/A	N/A	N/A
Oxygen Ready	N/A	N/A	N/A
Vacuum Switch	N/A	N/A	N/A
Built-in Air Dryer	N/A	N/A	N/A
Safety			



E*: European Version, N/A: Not Applicable, O: Optional, S: Standard