


VMD-32

KEY FEATURES:

- 32 l/min of dry air
- Compact size
- Wall mountable
- Easy to use
- Powder coated Al. Cabinet

PRODUCT DESCRIPTION

The VMD-32 is a wall mountable Air dryer unit. It can supply up to 32 l/min of dry air under normal conditions. The VMD-32 is used to supply a dry air source for as many as 2x VMUS-K3 Ozone Generators or even 5x VMUS-K units.

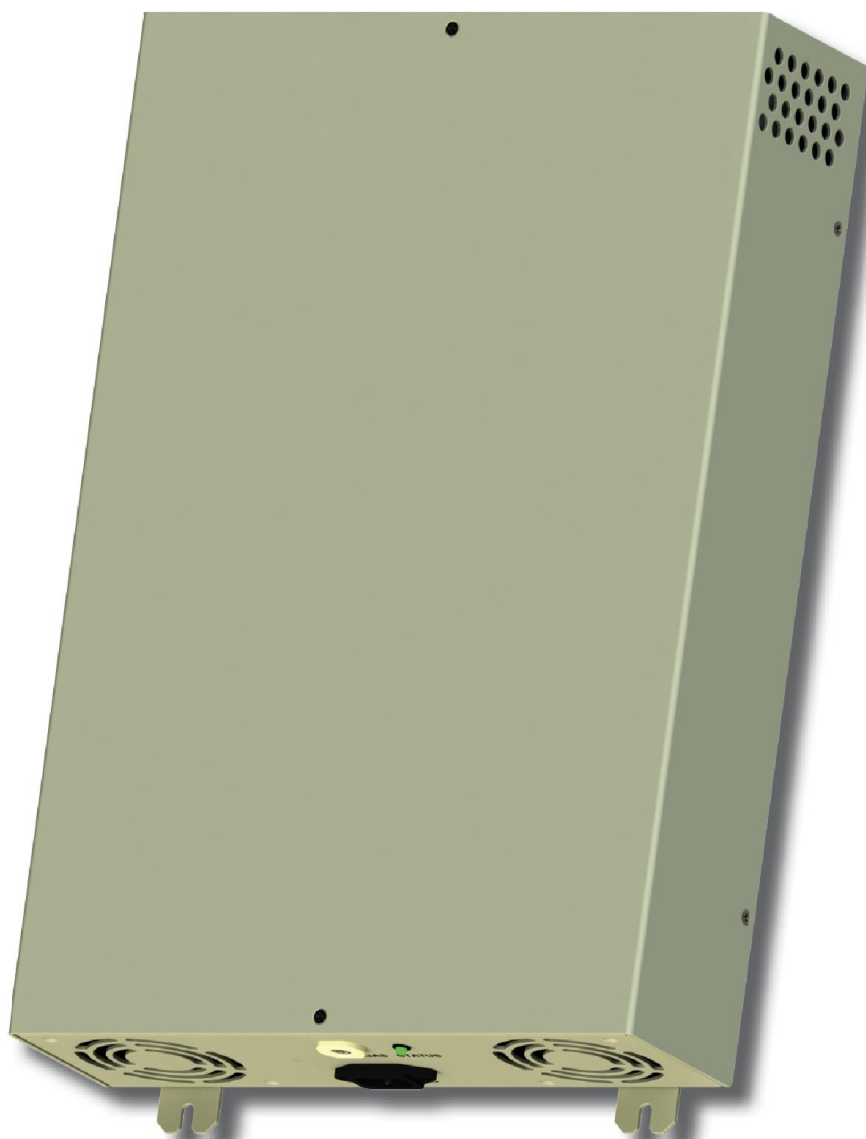

AZCO INDUSTRIES LIMITED
ADVANCED OZONE SYSTEMS

SPECIFICATIONS

	VMD-32	VMD-12	VMD-144
General			
Voltage [VAC, 50/60Hz]	100-240	In Development	100-120 (200-240)
Power Consumption [W]	225 Average (4A Max.)	In Development	In Development
Ambient Temperature [°C]	5 to 40		
Relative Humidity [%]	80		
Mass [Kg]	8.1	In Development	In Development
Dimensions [L x W x H] [mm] 1 mm = .039 inches	460 x 314 x 92	In Development	In Development
Installation	Refer to AZCO's installation manual for specific product		
Warranty [Refer to AZCO warranty sheet]	3 Year		
Ozone			
Generation Process	N/A	N/A	N/A
Process Gas [bar] 1 bar = 14.5 psi	Ambient air, free of dust and oil. Maximum pressure ± 0.36		
Production on Oxygen [Refer to Graph for more detail]	N/A	N/A	N/A
Options			
Internal Air Pump	N/A	N/A	N/A
Adjustable Output	N/A	N/A	N/A
Interlock	N/A	N/A	N/A
Flow Meter	N/A	N/A	N/A
Oxygen Ready	N/A	N/A	N/A
Vacuum Switch	N/A	N/A	N/A
Built-in Air Dryer	N/A	N/A	N/A
Safety			
CSA File #			
ETL File # [Canadian & US]			
UL File #			

E*: European Version, N/A: Not Applicable, O: Optional, S: Standard